

Greyline

PTFM 1.0

Technical Specifications:

The PTFM 1.0 Portable Transit Time Flow Meter is designed to measure clean, non-aerated liquids like water, chemicals, and oils with less than 2% solids or bubbles. The ultrasonic transducers can be mounted on vertical or horizontal pipes.



GENERAL SPECIFICATIONS


Operating Parameters:	For clean liquids in full pipes with less than 2% solids or gas bubbles
Calibration:	Built-in 5-key calibrator with English, French and Spanish menu language selection
Electronics Enclosure:	Portable, ABS
Accuracy:	<ul style="list-style-type: none"> • $\pm 1\%$ of reading or 0.03 m/s (0.1 ft/s), whichever is greater • Repeatability & Linearity: $\pm 0.25\%$
Power Input:	<ul style="list-style-type: none"> • Built-in NiMH battery for up to 18 hours continuous operation • External charger with 100-240 V AC 50/60 Hz input
Display:	White, backlit matrix — displays 5-digit flow rate with floating decimal, 14-digit totalizer, calibration menu, and daily flow report
Outputs:	<ul style="list-style-type: none"> • 4-20mA (500 Ω) when AC powered • USB for Data Log transfer by direct PC connection
Data Logger:	Programmable 300,000 data point capacity, time and date stamped or formatted flow reports including total, average, minimum, maximum, and times of occurrence
PC Software:	Greyline Logger for Windows 98 or higher. Retrieves, displays and saves data log files.
Operating Temp. (Electronics):	-20 °C to +60 °C (-5 °F to +140 °F)
Carry Case:	Rated IP67 with protective molded foam inserts
Language Selection:	English, French, Spanish
Approvals:	AC Charger is CE and UL approved
Approximate Shipping Weight:	5.5 kg (12 lb)

TRANSDUCER SPECIFICATIONS

Pipe Diameter:	50 mm to 1200 mm (2 in to 48 in)
Pipe Materials:	Any metal or plastic sonic conducting material including carbon steel, stainless steel, ductile iron, cast iron, PVC, PVDF, fiberglass, copper, brass, aluminum and pipes with bonded liners including epoxy, rubber and Teflon
Flow Velocity:	± 0.02 m/s to 12 m/s (± 0.07 ft/s to 39 ft/s) typical
Operating Frequency:	1.28 MHz
Operating Temperature:	-40 °C to +150 °C (-40 °F to +300 °F)
Transducer Mounting Kit:	Includes set of stainless steel pipe clamps, alignment bar and coupling compound
Transducer Cable:	RG-58 coaxial, 3.4 m (12 ft) with BNC connectors and seal jackets

POPULAR OPTIONS

Sensor Cable:	15 m (50 ft) coaxial pair with BNC connectors and seal jackets
----------------------	--

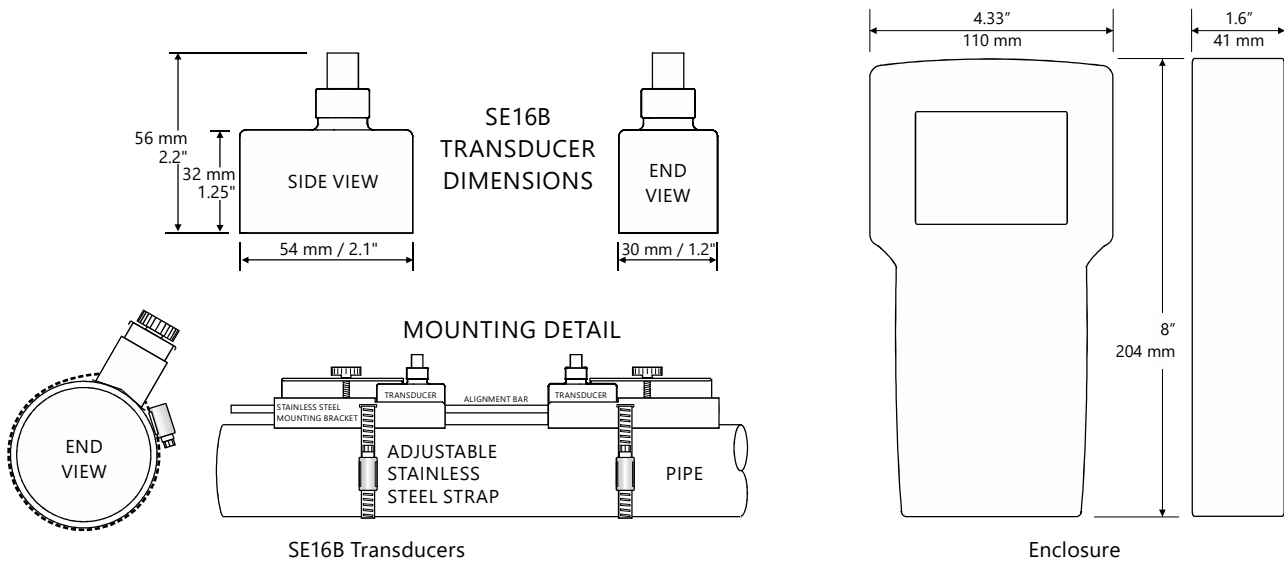

Delivering the Measure of Possibility

Pulsar Measurement offers worldwide professional support for all of our products, and our network of reps and distributors all offer full support and training. Our facilities in Malvern, UK and Largo, USA are home to technical support teams who are always available to answer your call or attend your site when required. Our global presence, with direct offices in the UK, USA, Canada, and Malaysia allow us to create close relationships with our customers and provide service, support, training, and information throughout the lifetime of your product.

By taking a step forward in echo processing technology, Pulsar Measurement addresses applications previously thought to be beyond the scope of ultrasonic measurement. This technology improves signal processing at the transducer head which has made it possible to increase resistance to electrical noise, enabling the transducer to 'zone in' on the true echo.

For more information, please visit our website:

www.pulsarmeasurement.com



Delivering the Measure of Possibility

INFO@PULSARMEASUREMENT.COM

Pulsar Measurement is a trading name of Pulsar Process Measurement, Ltd.

*Copyright © 2020 Pulsar Measurement
Registered Address: 1 Chamberlain Square CS, Birmingham B3 3AX
Registered No.: 3345604 England & Wales*

United States
11451 Belcher Road South
Largo, FL 33773
888-473-9546

Canada
16456 Sixsmith Drive
Long Sault, Ont. K0C 1P0
855-300-9151

United Kingdom
Cardinal Building, Enigma
Commercial Centre
Sandy's Road, Malvern WR14 1JJ
+44 (0) 1684 891371

Rev 1.0